



地址: 中国常州溧阳市中关村科技产业园上上路118号  
电话: 0519-87169158 13818017704 18851217988  
Add: No.118,shangshang Road,Liyang,Changzhou city,China  
Tel: 0519-87169158 13818017704 18851217988  
Http://www.jwellcz.cn www.jwell.cn

邮编(p.c): 213300  
传真 (Fax): 0519-87169158  
Post code: 213300  
Fax:86-519-87169158  
E-mail: salbap@jwell.cn

# CHANGZHOU JWELL EXTRUSION



版本号 Edition No.: 2018.04

常州金纬挤出机械制造有限公司  
CHANGZHOU JWELL EXTRUSION MACHINERY CO.,LTD.

**常州金纬挤出机械制造有限公司简介:**

常州金纬挤出机械制造有限公司是上海金纬公司的又一重要发展战略中心,其坐落于江苏省溧阳市江苏中关村科技产业园内,是一家致力于塑料挤出成型设备的研发、制造的高科技厂家。厂区占地面积 400 余亩,公司拥有一支高素质的研发队伍和经验丰富的机械、电气调试工程师团队,以及先进的机械加工基地和规范的装配车间。公司本着“用心持久、拼搏创新”的企业精神,不断探索挤出新领域的开拓。热烈欢迎国内外新老客户莅临我司参观、指导、合作、我们愿为您提供强有力的支持。



是中国塑料机械行业的著名品牌。

公司产品已遍布全国各地,并出口到俄罗斯、印度、韩国、印尼、中东、非洲和南美洲、西班牙、意大利等100多个国家和地区,深受客户好评。

**“品质卓越 完美如一”**

是金纬公司的质量方针,是全体员工努力的方向。

**“诚实守信”**

是我们铸就“百年金纬”的核心理念。

董事长: 何海潮 电话: +86-21-69596060



Changzhou JWELL Machinery Co.,Ltd is another development strategy center of Shanghai JWELL Machinery Co.,Ltd, locating at Jiangsu zhongguancun technology industrial park, Liyang city, Jiangsu province, a high-tech manufacturer specializing in research and development of plastic extrusion equipment. The factory area is of 400 acres; We have a high qualified R&D and experienced mechanical and electrical engineer team as well as advanced processing foundation and normative assembly shop. Our enterprise spirit is "Attentive, Enduring, Quick and Orderly", keeping on exploring of new extrusion field. Mostly welcome to new and old customers to visit us for investigation, guidance and cooperation. We are happy to offer powerful support!

**JWELL** and **Jinhailuo** and **Dyun** are famous brands in Chinese plastic machinery industry.

Our customers are all over China, and we have customers in Russia, India, Korea, Indonesia, Middle East, South America, Spain, Italy and other countries and areas. Our machines are well accepted by our customers.

President: He Haichao Email: he@jwell.cn



## 异向平行双螺杆挤出机 Counter Parallel Twin-screw Extruder

本公司生产的 SJP 各系列异向平行双螺杆挤出机, 主要用来生产加工 PVC 管材、型材、片板材制品, 具有产量高, 塑化好, 节能降耗, 运行平稳等显著特点, 电气控制配置先进, 可以按照客户的要求选择电脑柜或仪表柜等。

All kinds of SJP extruders that our company designs especially for producing the PVC pipe ,profile sheet and plate, our ex-truders can promise a good plasticization, high capacity and advanced electric control, and the electrical cabinet can be chosen by customer according to their own demands.

### 主要技术参数 Main technical parameters

型号 Model	SJP75/28	SJP93/28/31	SJP110/31	SJP120/31/26	SJP135/31
螺杆转速 rpm	45	45	45	45	45
电机功率 KW	45	75	110	132/110	160
生产能力 kg/h	150/250	250/400	400/500	500/700	1000/1300
中心高 mm	1050	1050	1050	1050	1050
净重 kg	4100	4700	6500	7500	8400

备注: 以上规格参数如有变更, 恕不另行通知。Note:The specifications are subject to change without prior notice.



## 异向锥形双螺杆挤出机 Counter Conical Twin-screw Extruder

本公司生产的 SJZ 各系列异向锥形双螺杆挤出机, 主要用来生产加工 PVC 管材、型材、片板材、造粒制品, 具有产量高, 塑化好, 节能降耗, 运行平稳等显著特点, 电气控制配置先进, 可以按照客户的要求选择电脑柜或仪表柜等。

All kinds of SJZ extruders that our company designs especially for producing the PVC pipe ,profile sheet and plate, our ex-truders can promise a good plasticization, high capacity and advanced electric control, and the electrical cabinet can be chosen by customer according to their own demands.

### 主要技术参数 Main technical parameters

型号 Model	SJZ35/80	SJZ45/100	SJZ51/105	SJZ55/110	SJZ65/132	SJZ80/156	SJZ92/188	SJZ110/220
螺杆转速 rpm	34.7	34.7	34.7	34.7	34.7	34.7	34.7	34.7
电机功率 KW	15	15	18.5	22	37/30	55	110	160
生产能力 kg/h	30/50	60/80	80/120	100/150	180/250	300/400	600/800	1200/1400
中心高 mm	1050	1050	1050	1050	1050	1050	1100	1100
净重 kg	1800	2500	3000	3500	4000	5500	8000	10000



## 同向锥双挤出机 Co-rotating Conical Twin-screw Extruder

根据市场及客户需求,我司成功开发出同向锥形双螺杆挤出机,主要用于生产 PVC 硬料和电缆料造粒,该设备主要有产量高、能耗低两大显著优点,深受用户欢迎。

In order to meet the demand of the market,JWELL successfully develops serials of co-rotating conical twin-screw extruder. Mainly used for processing PVC hard material and Various cables palletizing,The equipment main have high capacity ,energy saving feature which is approbated by customers.

### 主要技术参数 Main technical parameters

挤出机型号	螺杆转速	最大挤出量	主电机功率	总装机功率
Extruder Type	Screw speed Max (rpm)	Max.Output (kg/h)	Power of main motor (KW)	Total Power (KW)
JWT67/134	5~58	500~700	45	110

备注: 以上规格参数如有变更, 恕不另行通知。Note:The specifications are subject to change without prior notice.



## 各类包覆共挤机 Different Kinds of Coating Co-extruder

### 主要技术参数 Main technical parameters

型号	螺杆直径	长径比	螺杆转速	驱动功率	机筒加热功率	最大挤出量	中心高
Model	Dia ( mm )	L/D	Speed ( rpm )	Power ( KW )	Power ( KW )	Capacity ( Kg/h )	Center for high (mm)
JWS30/25	30	25	1-60	3-4	3	8-10	800-1200 可调
JWS35/25	35	25	1-50	4-5.5	6.9	10-15	800-1200 可调
JWS45/25	45	25	1-58	5.5-7.5	9	20-35	1100±100
JWS50/25	50	25/28	1-58	11-15	10	35-45	1100±100
JWS65/25	65	25/28	1-80	15-22	12	45-60	1100±100

备注: 以上规格参数如有变更, 恕不另行通知。Note:The specifications are subject to change without prior notice.



## PVC钙塑环保地板生产线

### PVC Calcium-plastic Environmental Floor Extrusion Line

PVC 钙塑环保地板生产线是由挤出机挤出 PVC 的基材,用四辊压延机组,分别把 PVC 彩膜 +PVC 耐磨层 +PVC 底膜,一次性压贴复合而成的产品,工艺简单、贴合靠热量完成,不含胶水。


#### PVC钙塑环保地板生产线优势

- 1、防水、防潮。根本解决了木质产品对潮湿和多水环境中吸水受潮后容易腐烂、膨胀变形的问题,可以使用到传统木制品不能应用的环境中。
- 2、多姿多彩,可供选择的颜色众多。既具有天然木质感和木质纹理,又可以根据自己的个性来定制需要的颜色。
- 3、高环保性、无污染、无公害、可循环利用。产品不含苯及甲醛,为环保产品,可循环利用大大节约了木材使用量,适合可持续发展的国策,造福社会。
- 4、高防火性。能有效阻燃,防火等级达到 B1 级,遇火自熄,不产生任何有毒气体。
- 5、安装简单,施工便捷,不需要繁杂的施工工艺,节省安装时间和费用。
- 6、不龟裂,不膨胀,不变形,无需维修与养护,便于清洁,节省后期维修和保养费用。

PVC floor extrude by PVC' S base material get through four roll calender machines , and PVC color film + PVC wearing layer + PVC basis of membrane , next press and paste these films to be products ,simple process , complete the paste that depend on heat ,there is no glue.

#### PVC calcium-plastic environmental floor extrusion line advantage

- 1.Waterproof and moistureproof, it can fundamentally solve the wooden product problems like easily be rotted and dilated deformation after absorbing water or affected with wet environment . Therefore, our company 's WPC floor can be used in this kind of environment which the traditional wood product cannot.
- 2.Colorful , many colors are optional.There are natural wooden feeling and wooden texture, and also you can choose the color you need according to your personality.
- 3.Environmental protection , non- pollution, pollution-free, recycle . The products do not contain benzene and formaldehyde ,it' s a environmental products, recyclability reduce usage of wood,and that is suitable for the sustainable development of national policy and it also benefits society.
- 4.Good fireproofing. it can stop fire effectively , fire rating reach level B1,when the fire touch products, the fire will put out immediately, and do not produce any toxic gas.
- 5.Easy for installation, convenient for wok, simple construction ways, save installed time and fees.
- 6.Not cracking, not expand, not out of shape, do not repair and maintain, easy to clean, save after-repair and after-maintain fees.

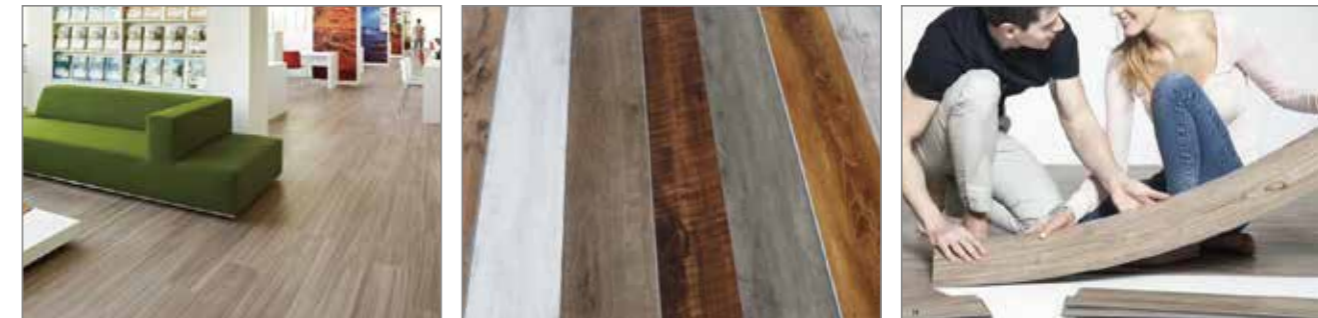

#### 主要技术参数 Main technical parameters

机型 Model	80/156	92/188	110/220
制品宽度 Product width	1050	1220	1220
制品厚度 Product thickness	3-8	3-8	3-8
最大挤出量 Capacity	400--500KG/H	800--1000KG/H	1200--1400KG/H
主电机功率 Main motor power	75KW	110KW	160KW




## PVC木塑快装墙板生产线

### PVC Wood-Plastic Quick Assembling Board Extrusion Line

该生产线主要用于生产木塑装饰材料，制品广泛用于家装和工装市场，具有无污染、高寿命、抗冲击、保温隔热、防水防潮、防火阻燃、易安装易擦洗、高效省时、时尚美观、可回收利用等特点，可用于高档墙饰面、吊顶、门套、窗套、吸音、保温要求的场所。

The machine is used for producing WPC decoration product, which is widely used in house and public decoration field, features non-pollution, high lifetime, heat insulation, anti-fire, easy clean and maintenance, easy change and recyclable. It can be of high quality decoration material, ceiling, door frame, window frame, sound proof and heat insulation.

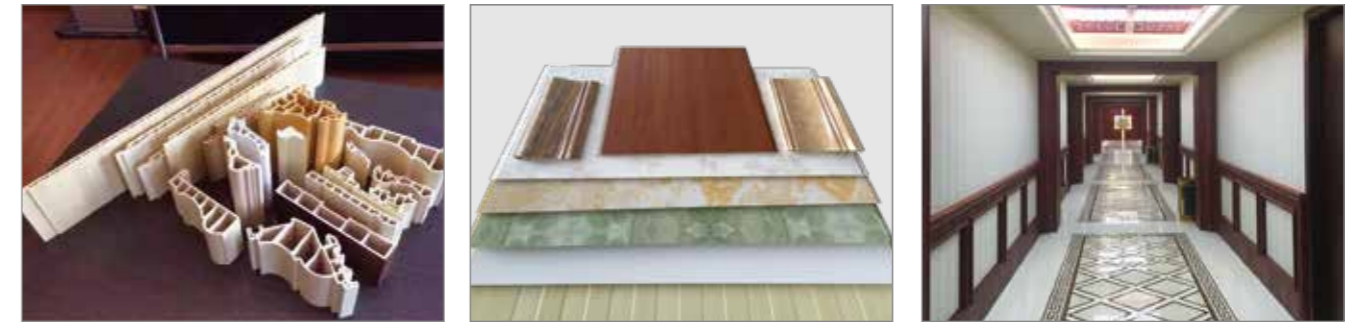

#### 主要技术参数 Main technical parameter

制品最大宽度	180	300/400	600
Production width (mm)	180	300/400	600
主机型号 Extruder type	SJZ51/105	SJZ65/132	SJZ80/156
主机马达 Motor power (kw)	22	37	55
辅机型号 Type	YF180	YF300/400	YF600
最大挤出量 Output (kg/h)	80-100	150-200	300-400
冷却水用量 Cooling water (m <sup>3</sup> /h)	6	7	8
压缩空气用量 Compressor air (m <sup>3</sup> /min)	0.6	0.6	0.6

备注：以上规格参数如有变更，恕不另行通知。Note: The specifications are subject to change without prior notice.




## PVC异型材高速生产线 PVC High Speed Profile Extrusion Line

**应用:** YF塑窗异型材生产线配备锥双或平双螺杆挤出机,可加工PVC塑料门窗异型材、钢塑复合异型材、装饰型材等。

**性能和优点:** 参照国外最新技术,对机组进行优化设计,具有塑化均匀,剪切速率小,产量高,使用寿命长等优点。该机组有双螺杆挤出机、真空定型台、牵引机、切割机、贴膜机、翻料架等组成。主机采用进口交流变频或直流调速拖动,温控仪表采用进口品牌。辅机真空泵和牵引电机均采用优质产品,维护简便,更换螺杆机筒及模具后,可以直接挤出仿真木发泡异型材,效果比单螺杆更佳。

**Application :** YF series production line is designed for conical or parallel extrusion of PVC plastic window and door's ,steel-plastic composit and decoration profile.

**Properties and advantages:** This line features stable Plasticization, high output,low sheering force,long life service and other advantages. The production line consists of control system, conical twin screw extruder or parallel twin screw extruder,extrusion die, calibration unit,haul off unit, film covering machine and stacker. The extruder is equipped with alternating-current inverter (ABB or Eurotherm drive), imported temperature controller (RKC,Japan). The calibration unit's pump and haul off unit's reducer are famous brand products. After simple changing of the die and screw, it also can produce the foam profiles.

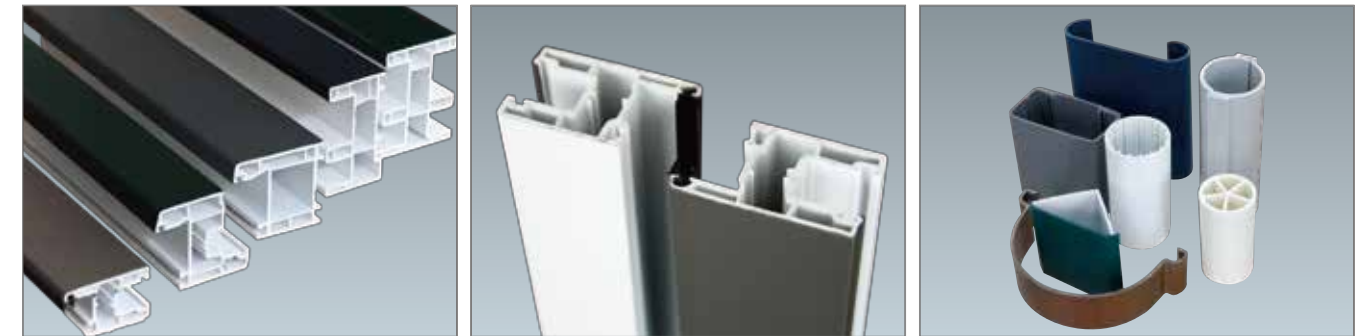

### 主要技术参数 Main technical parameter

型号 Model	YF240	YF240	YF240A
最大制品宽度 Max.width of product (mm)	240	240	150*2
主机型号 Extruder model	SJP75/28	SJP93/28/31	SJP110/28
最大挤出量 Max.extrusion capacity (kg/h)	150-250	250-400	400-500
主机功率 Extruder power (kw)	37	55	75
冷却水用量 Cooling water (m³/h)	7	8	10
压缩空气用量 Compressed air (m³/min)	0.6	0.6	0.8

备注: 以上规格参数如有变更,恕不另行通知。Note:The specifications are subject to change without prior notice.

## PE&PP木塑地板挤出生产线 PE&PP Wood-Plastic Floor Extrusion Line

PE&PP 木塑地板是指木塑复合材料的配混、脱挥、制品挤出成型分别在不同的设备中完成，即原材料按一定配方配混好之后，中间造成木塑颗粒，再挤出加工成木塑地板的这个过程。

目前两步法应用较为广泛，一般是用锥双挤出机或平双挤出机造粒，再用锥双或单螺杆挤出机挤出成型制品，主要使用在室内外地板、护栏、托盘等PE&PP类木塑产品的挤出成型。

PE&PP Wood-Plastic Floor is that the wood-plastic composite materials complete in different equipments of mixing, from play, extruding products, mixing the raw material in a certain formula, forming wood-plastic particles in the middle, and then squeezing out products.

And nowadays, the two-step way is used currently, application of a wider general use dual-cone-or two-extruder extruder granulation, and then double-cone or single screw extruder extrusion products, mainly used in floor indoor or outdoor, parapets, tray, such as PE&PP plastic extrusion products.



### 主要技术参数 Main technical parameter

主机型号	螺杆规格	主电机功率	生产能力
Model	mm	Power of main motor(KW)	Output(kg/h)
SJZ65	65/132	37	150-180
SJZ72	72/152	45	220-300

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## 木塑中空门板挤出生产线 Cross Door Plate Extrusion Line

该生产线可以生产宽幅为 600-1200 之间任何规格宽幅的 PVC 塑木门板, 设备主要有 SJZ92/188 锥形双螺杆挤出机、定型台、牵引机、切割机、放料架等组成, 设备配置先进, 制作精良, 主要电气控制元件采用全球知名品牌, 挤出系统设计中吸取了国外同行业先进技术成果, 可靠性和耐久性程度高。辅机现有两种配置: YF1000 和 YF1250, 可供广大用户选择。

The production line can produce the PVC Plastic-wood door of the width between 600 and 1200 .the device has SJZ92/188 conical twin-screw extruder, calibration, hall-off unit, cutter, such as stacker, targeting the advanced equipment, well-produced, the main electrical control devices are well-known global brands, extrusion system design imbibes the technic of foreign country in this line, and it has a highly dependability and wearness.The other scheme have two types:it' s supply for the custom to choose: YF1000 and YF1250.



### 主要技术参数 Main technical parameter

生产线种类 Type	PVC木塑门板线 WPC door Panel Extrusion line		
	YF800	YF1000	YF1250
辅机型号 Model	YF800	YF1000	YF1250
最大制品宽度 Max Width of product (mm)	800	1000	1250
主机型号 Extruder model	SJZ80/156	SJZ92/188	SJZ92/188
主机驱动功率 Extruder power (KW)	55	132	132
最大挤出量 Max of extrusion capacity (Kg/h)	250-350	400-600	400-600
冷却水用量 Cooling water (m <sup>3</sup> /h)	12	15	15
压缩空气用量 Compressed air (m <sup>3</sup> /min)	0.8	1	1

备注: 以上规格参数如有变更, 恕不另行通知。Note:The specifications are subject to change without prior notice.

## PVC结皮(木塑)发泡板材生产线 PVC Skinning (WPC) Foaming Board Extrusion Line

### PVC发泡板及木塑发泡板的应用/PVC foaming board and WPC foaming board application:

交通运输业 轮船、飞机、客车、火车车厢、顶蓬、厢体芯层、内部装饰用板。  
建筑装潢业 建筑物外墙板、内装饰用板、住宅、办公室、公共场所建筑物隔间、商用装饰架、无尘室用板、吊顶板、家庭橱柜、吊柜和家居。通过油漆印刷、贴膜和热压设备,可以生产各类仿木制品。

Transportation industrial: Ship, plane, bus, chamber of train, roofing, core layer, inner decoration board.  
Construction and decoration industrial: outer wall board, inner decoration board, housing, office, public construction board, furniture, cupboard, roofing. Adopting printing, film coating and thermo-embossing equipment, will get all kinds of emulational wooden product.

### 结皮(木塑)发泡生产线/Skinning (WPC) foam board extrusion line

该设备为发泡板行业根据自由发泡和结皮发泡的特点,采用自由发泡设备的挤出部分和结皮发泡的定型辅机部分发展而来的。具有产品质量兼有结皮发泡的平整度、自由发泡设备的低密度、表面硬度间于结皮发泡和自由发泡之间的特点;另外设备投资小,接近自由发泡设备,利于市场的推广。

This extrusion line is made according to the features of free foamed board and skinning foamed board by using the extrusion system for free foamed board machine and the downstream equipment for skinning foamed board. The product produced by this machine has the features of smooth surface, low density, and the surface hardness of the product is between the skinning foamed board and free foamed board. The investment of this machine is close to the investment of free foamed board extrusion line, which makes it easy for market promotion.



### 主要技术参数 Main technical parameter



机型 Model	结皮发泡板 Skinning foaming board extrusion line	共挤发泡板 Co-extrusion foamed board extrusion line
制品宽度 Products Width	1220-1600mm	1220-1600mm
制品厚度 Products Thickness	5-20mm	3-20mm
挤出机规格 Extruder Specification	SJZ80/156	SJZ65/132、SJZ80/156
最大挤出产量 Capacity (Max.)	300-400Kg/h	400-500kg/h
主电机功率 Main Motor Power	75Kw	37KW/75KW

备注: 以上规格参数如有变更, 恕不另行通知。Note: The specifications are subject to change without prior notice.

## PVC\PP\PE\PC\ABS等异型材挤出生产线 PVC、PP、PE、PC、ABS Small Profile Extrusion Line

本公司吸取了国内外先进技术，成功开发出适合用户需求的小型材生产线。该机组有单螺杆挤出机或双螺杆挤出机、真空定型台、牵引机、切割机、翻料架等几部分组成，生产线具有塑化好，产量高，能耗低等显著特点。主机采用进口交流变频器调速，温控仪表采用日本RKC产品。辅机真空泵和牵引电机均采用优质产品，维护简便。

By adopting the foreign and domestic advanced technology, we successfully developed the small profile extrusion line. This line consists of Single Screw Extruder, Vacuum Calibration Table, Haul-off Unit, Cutter and Stacker, the producing line features of good plasticization, high output capacity, low power consumption and etc. The main extruder speed controlled by imported AC inverter, and temperature control by Japanese RKC temperature meter, vacuum pump and traction gear reducer of the downstream equipment are all good quality products, and also easy maintenance.

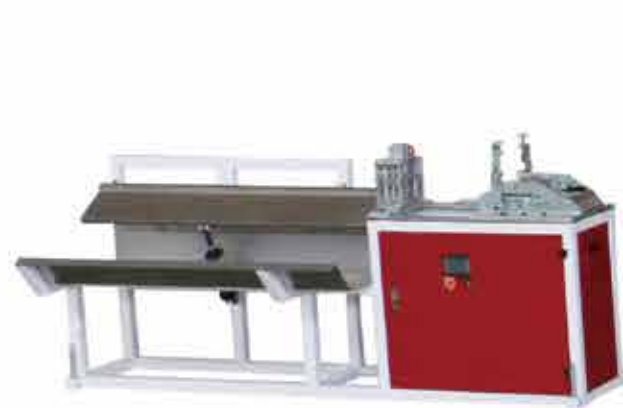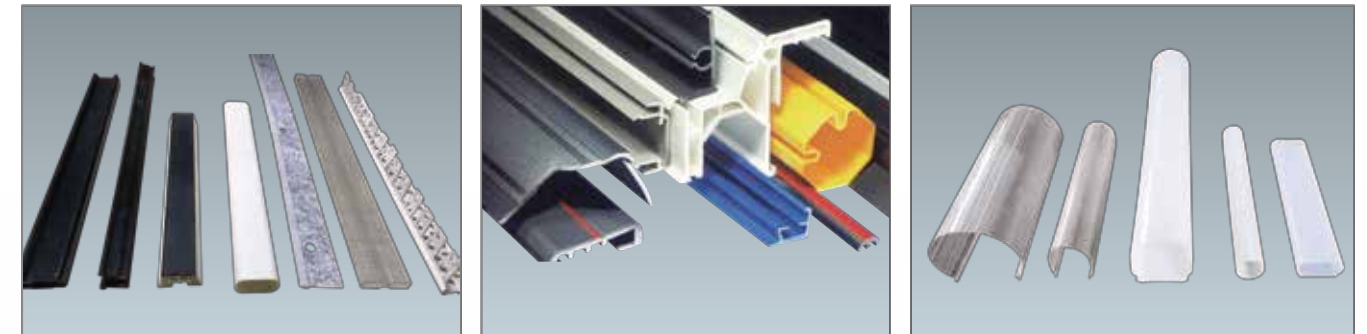

### 主要技术参数 Main technical parameter

型号 Model	YF50	YF108	YF180	YF240	YF300
最大制品宽度 Max. width of product (mm)	50	108	180	240	300
主机型号 Extruder model	JWS 45	JWS 50	JWS 65	JWS 90	JWS 120
驱动功率 Power (kw)	15/11	22/18.5	30/22	55/45	90/75
冷却水用量 Cooling water (m <sup>3</sup> /h)	4	4	5	7	7
压缩空气用量 Compressed air (m <sup>3</sup> /min)	0.5	0.6	0.6	0.6	0.6

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

## PVC、TPU、TPE密封条生产线 PVC、TPU、TPE Seal Profile Extrusion Line

该生产线主要用于加工 PVC、TPU、TPE 等不同材料的密封条，性能稳定产量高、能耗低等特点。主机采用进口交流变频调速，西门子显示屏，操作简单，维护方便。

The machine is used for producing seal of PVC, TPU, TPE etc material, features high output, steady extrusion, low power consumption. Adapting famous inverter, SIEMENS PLC and screen, easy operation and maintenance.



### 主要技术参数 Main technical parameter

主机型号 Extruder type	JWS45/25	JWS65/25
主机马达 Motor power (kw)	7.5	18.5
最大挤出量 Output (kg/h)	15-25	40-60
冷却水用量 Cooling water (m³/h)	3	4
压缩空气用量 Compressor air (m³/min)	0.6	0.6

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

## PVC自由发泡/仿大理石板挤出生产线 PVC Free Foaming/UV Imitation Marble Board Extrusion Line



### 应用/Application:

- 广泛应用于网板印刷、电脑刻字、广告标示、展板、标志用板 相册板 等行业。
- UV仿大理石板
  - a、板材表面覆仿大理石纹薄膜，或者热转印仿大理石纹并UV固化处理，良好的抗划伤性，耐刮擦性；
  - b、板材花色、品种多样，施工方便；
  - c、在室内墙体装潢中替代大理石等天然石材，良好的耐老化、抗紫外线、耐黄变，绿色环保、无辐射。
- PVC free foamed board is widely used in advertisement board, exhibition board, picture frame, etc.
- UV imitation marble board:
  - a、Board surface coat imitation marble film, or laminate imitation marble and through curing treatment, good anti scratch, anti scratch resistance.
  - b、Board with variety of color, it's convenient to construct;
  - c、Instead of marble etc. natural stone in the interior decoration, with good aging resistance、anti-ultraviolet ray、anti-yellow, green and environment、no radiation.

### 主要技术参数 Main technical parameter

机型 Model	SJZ80/156		SJZ80/156
制品宽度 Production width	1220mm	1560mm	2050mm
制品厚度 Production thickness	1-18mm	1-12mm	1-10mm
挤出机规格 Extruder model	SJZ80/156	SJZ80/156	SJZ80/156
最大挤出产量 Capacity (Max.)	350-450kg/h	350-450kg/h	350-450kg/h
主电机功率 Main motor power	75kw	75kw	75kw

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## PVC单层、多层隔热瓦楞板、琉璃瓦挤出生产线 PVC Single /Multi Layer Resistance Heat Corrugated Roofing Extrusion Line



### PVC波浪瓦及琉璃瓦的特点及应用:

- 防火性能卓越，属难燃材料，无自燃性，抗化学腐蚀、耐酸、碱，散热快，采光性能极佳，寿命长；
- 采用特殊技术配方，耐室外大气暴晒，隔热性能好，炎热夏季中能提供较金属用瓦更舒适的环境；
- 适用范围广，厂房、仓库、车棚、农贸市场、围板、墙身、临时商铺、隔热棚等非常适用。

### PVC corrugated board and Step-Roofing feature and application:

- The fire protection performance is remarkable, difficult to burn. Anti-corrosion, Acidproof, alkali, radiates quickly, high lighting, long life-span.
- Adopt special technology, bears the outdoor atmospheric insolation, the heat insulation performance is good, in the hot summer can provide compares the metal to use a tile more comfortable environment.
- The applicable scope is broad, the workshop, the warehouse, the vehicle shed, the agricultural market fair, the brattice, the wall body, the temporary store, the heat insulation awning and so on are suitable.

### 主要技术参数 Main technical parameter

挤出机规格 Extruder specification	SJZ80/156 & SJZ51/105	SJZ80/156 & JWS50/30	SJZ92/188 & JWS65/30
主电机驱动 Main motor power	55kw	55kw	110kw
制品宽度 Products width	1140mm	850mm	880mm
最大挤出产量 Capacity ( Max. )	300-400kg/h	300-400kg/h	400-600kg/h

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## PS 塑料发泡镜框型材生产线 PS Foamed Picture Frame Extrusion Line




YF 系列 PS 塑料发泡镜框型材挤出生产线，主要有单螺杆主挤出机和配套共挤机，冷却水槽，热转印机组，牵引机，切割机，翻料架组成，整条生产线配有进口 ABB 交流变频器控制，进口 RKC 温空仪表等元器件，具有塑化好，产量高，使用可靠的特点。其中热转印机组是根据进口样机改进设计而成，它主要采用热压印的方式，将色带上的涂料压印在发泡 PS 异型材上。该机外观美观、性能可靠、使用方便、烫印精确、吸附力强。且调节手轮可以压印各种不同形状的异型材。该设备主要和塑料挤出机、牵引机、切割机等配套使用，是目前塑料机械行业新开发的一种最新的配套辅机。

YF Series PS Foam Profile Extrusion Line, consists of single screw extruder and the special co-extruder, with the cooling water tank, hot stamping machine system, haul-off unit, and stacker. This line with imported ABB AC inverter control, imported RKC temperature meter etc. and features of good plasticization, high output capacity, and stable performance etc. The hot stamping machine system combined foreign technology, by the hot stamping embossing method, transfer the coating layer from the film to the PS foamed profile. The machine with good appearance, stable performance, accurate & easy operation. By adjust the embossing wheel the machine can work on various of different profiles. Working together with the main extruder and other extrusion down steam equipments, this line is popular as the latest developed producing line.


### 主要技术参数 Main technical parameters

型号 Model	YF1	YF2	YF3	YF4
主机 Extruder	JWS65	JWS90	JWS100	JWS120
共挤机 Co-extruder	JWS35	JWS45	JWS45	JWS45
生产制品宽度 Products width	3inch	4inch	5inch	6-8inch
配套热转印机 Hot stamping machine	8组	10组	10组	12组
生产线速度 Speed	2-6m/min	2-6m/min	2-6m/min	2-6m/min

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

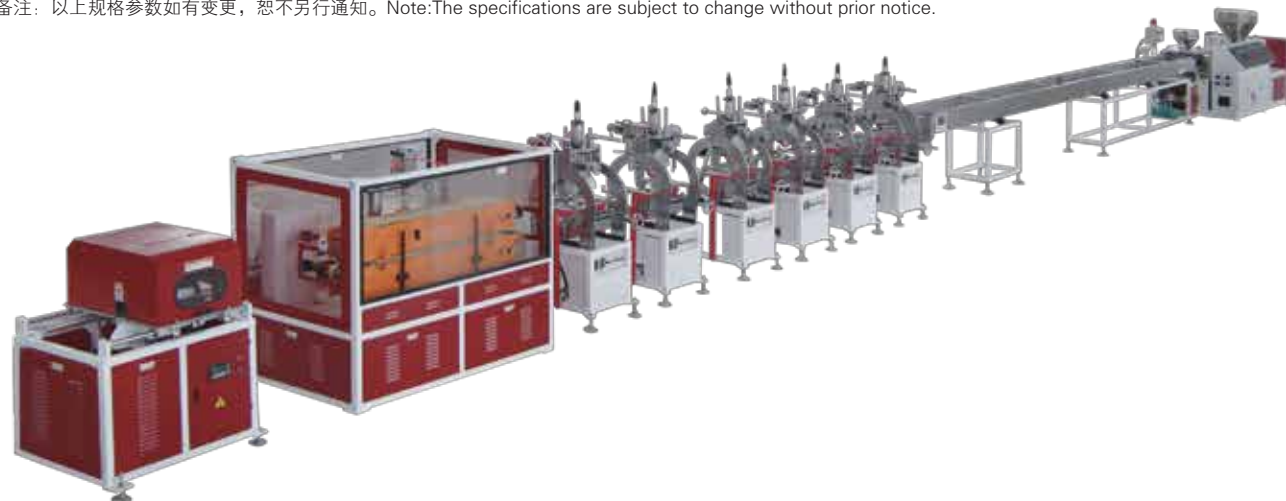

## PVC、PP挂壁板高速挤出生产线 PVC,PP Siding Plate Extrusion Line

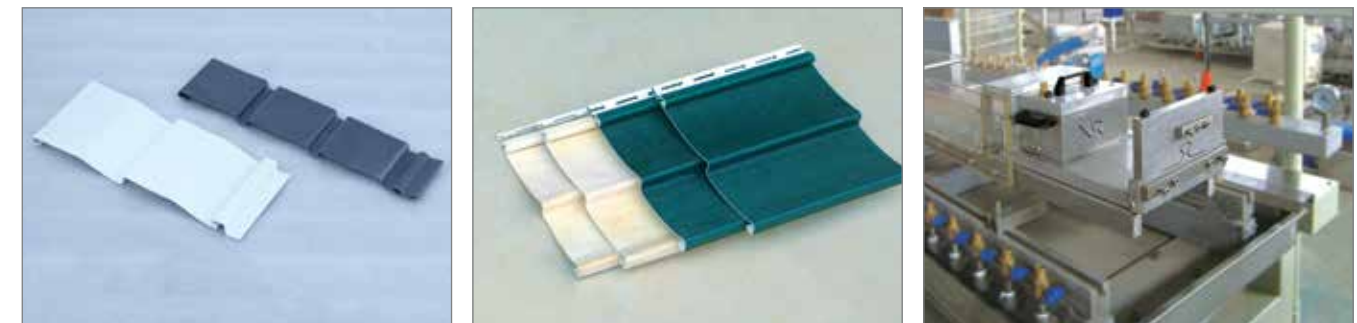

### YF系列挂壁板生产线 YF series siding panel extrusion line

挂壁板适用于家用、办公楼、高档别墅外墙面的防护，表面可覆合PVC、ASA、PMMA等材料，可以用在热或冷、干或湿的地方，能经受长期紫外线照射和狂风暴雨的恶劣气候条件。

挂壁板生产线能快速更换压花辊，定型台的特殊构造和积累的生产经验，能保证生产线的使用寿命长和操作简便，生产线中冲孔机，实现了挂壁板的在线冲孔，保证了经济性，也可根据客户要求配备滚花机、喷码机等设备。


Siding panel applied in house ,office building, villa, and wall protection. Due to its top layer covered with PVC, ASA, or PMMA, it can be used in hot, cold dry or wet place, can bear long time sun light ,wind, rain and bad weather.

This line can be equipped with different pattern rollers, easily changeable.Special designed calibration unit and good processing experience can make operation easy and extend its life. Punching on-line , it is more economical way. As per customer's requests, it also can be equipped with rolling machine,printer, coding machine and so on.

### 主要技术参数 Main technical parameters

生产线型号 Model	Line model	低速线 ( Low speed line )	高速线 ( High speed line )
辅机型号 Model	Model	YF-GD	YF-GG
辅机总功率 Power	Total power	42.3KW	52.8KW
线速度最大 Line speed	Max speed	4m/min	20m/min
冷却水 Cooling water (m <sup>3</sup> /h)	Water cooling	5m <sup>3</sup> /h	8m <sup>3</sup> /h
压缩空气 Compressed air	Compressed air	0.6Mpa	0.6Mpa

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

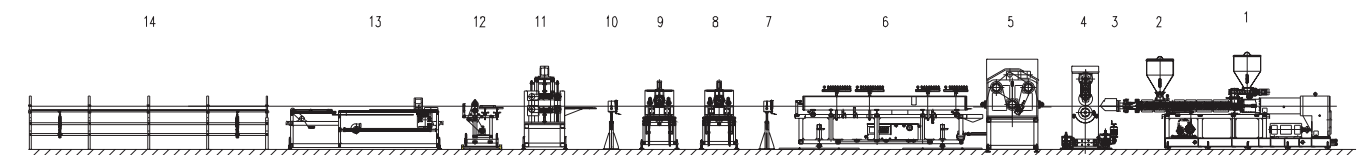

PVC siding plate extrusion line chart

## PVC异向平双螺杆造粒挤出生产线 PVC Counter Parallel Twin-screw Pelletizing Extrusion Line

该机组是由系列平双螺杆挤出机与相应造粒辅机组成的成套设备，主要适用于 PVC 软质，硬质造粒。生产的塑料颗粒均匀、密实、美观，辅机采用模面切粒，风送集料，振动分离冷却，具有自动化程度高，生产效率佳等特点。

This pelletizing machine is composed by a counter parallel twin-screw extruder and downstream equipment, it is suitable for the pelletizing of PVC soft and rigid, The pellets produced by this machine is evenly, solid, elegance. The pelletizing downstream equipment is the die face cutter, air transferring unit, vibration separating and cooling unit. This pelletizing downstream equipment has the features of high automation and high production efficiency.

### 主要技术参数 Main technical parameters

主机型号 Model	螺杆规格 (mm)	颗粒规格 (mm)	主电机功率 Power of main motor(Kw)	生产能力 Output(Kg/h)
SJP93	95/22	φ3-φ4	55	300-400
SJP120	120/26	φ3-φ5	110	500-600
SJP135	135/31	φ3-φ5	160	800-1200

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## PVC异向锥双螺杆造粒挤出生产线 PVC Counter Conical Twin-screw Pelletizing Extrusion Line

该机组是由系列锥双螺杆挤出机与相应造粒辅机组成的成套设备，主要适用于 PVC 软质，硬质造粒。生产的塑料颗粒均匀、密实、美观，辅机采用模面切粒，风送集料，振动分离冷却，具有自动化程度高，生产效率佳等特点。

This pelletizing machine is composed by a counter conical twin-screw extruder and downstream equipment, it is suitable for the pelletizing of PVC soft and rigid, The pellets produced by this machine is evenly, solid, elegance. The pelletizing downstream equipment is the die face cutter, air transferring unit, vibration separating and cooling unit. This pelletizing downstream equipment has the features of high automation and high production efficiency.

### 主要技术参数 Main technical parameters

主机型号 Model	螺杆规格 mm	主电机功率 Power of main motor(KW)	生产能力 Output(kg/h)
SJZ65	65/132	37	200-300
SJZ80	80/156	55	300-500
SJZ92	92/188	110	600-800
SJZ110	110/220	160	800-1200

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## 单螺杆挤出机 Single Screw Extruder

该机型主要用于异型材产品的挤出，螺杆机筒的结构形式多样，加工精度高，塑化好，产量高，适合不同用户需求，电气控制元件配置高档，可靠性好。适合加工 PVC/PC/ABS 等各种异型材产品。

This model of equipment mainly used to extrude profile, the structure and form of screws and barrels vary a lot, and the screws and barrels are processed precisely which can guarantee a good plasticization, high capacity and can meet different customer's needs, the electrical controlling parts are equipped in high class which made it safe to operate. Suitable for PVC/PC/ABS Profile.

### 主要技术参数 Main technical parameters

挤出机型号 Model	螺杆直径 mm	长径比 L/D	传动功率 KW	螺杆转速 rpm	最大产量 kg/h	加工树脂	中心高 mm
JWS45	45	25/28	11/15/18.5	10-100	25/30/38	PVC/ABS/PC等	1000
JWS65	65	25/28	18.5/22/30	10-100	50/60/80	PVC/PC/ABS等	1000
JWS75	75	25/28	37	10-100	80	PVC/PC/ABS等	1000
JWS80	80	28/30	37	10-90	100	PP/ABS/PC等	1000
JWS90	90	28/30	45	10-90	120	PP/ABS/PS等	1000
JWS120	120	28/30	75	10-90	250	PC/ABS 等	1000

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



## JWS45/25超高分子量聚乙烯 (UHMW-PE) JWS45 / 25 Single-screw Extruder for Ultra High Molecular Weight Polyethylene (UHMW-PE)

该挤出机采用具有我司专利的螺杆和机筒结构，可用于加工 150 万以上分子量的粉料，克服了因流动性差、易降解导致力学性能下降等问题，使设备挤出过程中塑化性好，生产较稳定。另外该挤出机采用高效节能电机驱动装置、红外节能加热圈，有效降低了生产能耗。该设备具有结构紧凑，外形美观，占用空间小，操作方便等优点，可用于生产各种小型的板材、型材、棒材制品。

The extruder has our patented design for screw and barrel, which can be used to process more than 1.5 million molecular of the powder material. By overcoming poor flow ability, Mechanical properties decreasing due to easy degradation, etc, The extruder can have stable output and reliable plasticization during production.



Also the extruder equips high efficient and energy saving driving motor, infrared energy-saving heaters, reducing energy consumption.

The extruder has a compact structure, beautiful appearance, small space, easy operation etc, can be used to produce a variety of small plates, profiles, rods products.

### 主要技术参数 Main technical parameters

型号 Model	JWS45/25
螺杆转速 rpm	3-25
最大挤出量 kg/h	3-10
电机功率 KW	5.5
加热功率 KW	9.4

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

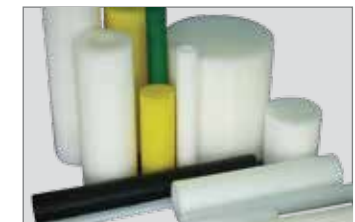



## 木塑制品表面加工设备 Surface Process Equipments for WPC Products

### 砂光机 Sander

此机床使用于定厚砂光,精细砂光等各种板材的表面处理。  
This machine suits for the thickness sanding, fine sanding and polish the surface of other various boards.



### 门板转印机 Transfer printing machine for door

此机器主要用于木塑整板门、木塑橱柜门板、PVC 整板门、墙板的花纹图案表面转印。机器使用的是高温转印,有除尘,板材预加热装置。  
The machine is used for surface design transferring of wood-plastic door, wood-plastic cabinet door board, PVC door and wall board. Using high temperature transferring, this machine can automatically remove dust and have board pre-heating device.



### 木塑压花机 WPC embossing machine

木塑压花机主要用于 PE\PP\PVC 木塑型材、板材等木塑材料表面的花纹压制,使木塑制品表面木质感更好。采用的压花辊表面可以加工成各种木纹纹理,表面可以镀硬铬,辊腔内加热,操作简单,耐磨损。  
The wood-plastic embossing is mainly used for the pattern of repression of PE\PP\PVC wood plastic profile, sheet surface, it's better for the wood products surface of wood texture. the surface of the embossing can be processed all kinds of wood texture, surface can be hard chrome plating, Roller cavity heating, simple operation and wear-resistant.



### 门板雕刻机 Carving machine for door

此机器主要使用于木塑门板,实木门板,密度门板,橱柜门板的雕花镂空,机器使用横向纵向上下三轴控制,电脑操作,可完成门板的各种雕刻。  
This machine is mainly used for pattern carving of wood-plastic board, hard wood board, density board and cabinet board. It uses three spindles as landscape orientation, lengthways and up and down. All kinds of engraving by computer.



## 木塑制品检测设备 Testing Equipments for WPC Products

### 紫外线加速老化试验机 Ultraviolet accelerated aging test machine

适用于测试材料及制品。经在阳光、湿度、温度、凝露等气候条件的变化下检验有关产品及材料老化现象程度,在短时间内得到变色、退色等情况。  
Suitable for testing kinds of material and products. Under the climate changes of sunshine, temperature, humidity, condensation etc, In order to test related products and material aging degree. In a short time get discoloration, fading and so on.



### 简支梁冲击试验机 Impact tester

主要用于硬质塑料板材、管材、异型材、增强尼龙、玻璃钢、陶瓷、铸石,电绝缘材料等非金属材料冲击韧性的测定。符合 GB/T1043《硬质塑料简支梁冲击试验方法》以及 ISO179、ISO9854-1、DIN8078、DIN53453 等要求。具有性能稳定可靠、精度高,使用简便等特点,可直接计算冲击能量,保存 60 个历史数据,6 种单位变换,两屏显示,可显示实用角度和角度峰值或能量,是化工行业、科研单位、大专院校,质量检验部门及专业生产厂家实验室等单位理想的试验设备。

Mainly used in testing the impact toughness of hard plastic sheet, pipe, profile, enhance nylon, glass, steel, ceramics, cast stone, electrical insulation, and other non-metallic materials. According to GB/T1043, ISO179, ISO9854-1, DIN8078, DIN53453, etc.. With the advantages such as stable and reliable performance, high precision, simple operation and direct calculation of the impact energy, save 60 historical data, transform of 6 kinds of units, screen display, displaying the practical angle and angle peak or energy, etc, it is the ideal test equipment for chemical industry, scientific research units, universities and colleges, quality inspection departments and professional manufacturers.




### 熔体流动速率仪 Melt flow indexer

用于测定热塑性树脂的熔体质量流动速率 (MFR)、熔体体积流动速率 (MVR) 和熔体密度,它不仅适用于熔融温度较高的聚碳酸酯、尼龙、氟塑料、聚芳砜等工程塑料,也适用于聚乙烯、聚苯乙烯、聚丙烯、ABS 树脂、聚甲醛树脂等熔融温度较低的塑料测试,广泛地应用于塑料原料、制品、石油化工等行业以及相关大专院校、科研单位和商检部门。

It allows for the measurement of melt mass-flow rate (MFR) and melt volume-flow rate (MVR), melt density test, not only suitable for the high melting temperature engineering plastics, but also for low melting temperature plastics. It is widely used in chemical industry, scientific research units, universities and colleges, quality inspection departments.



## SPC地板工艺流程 SPC Floor Production Process

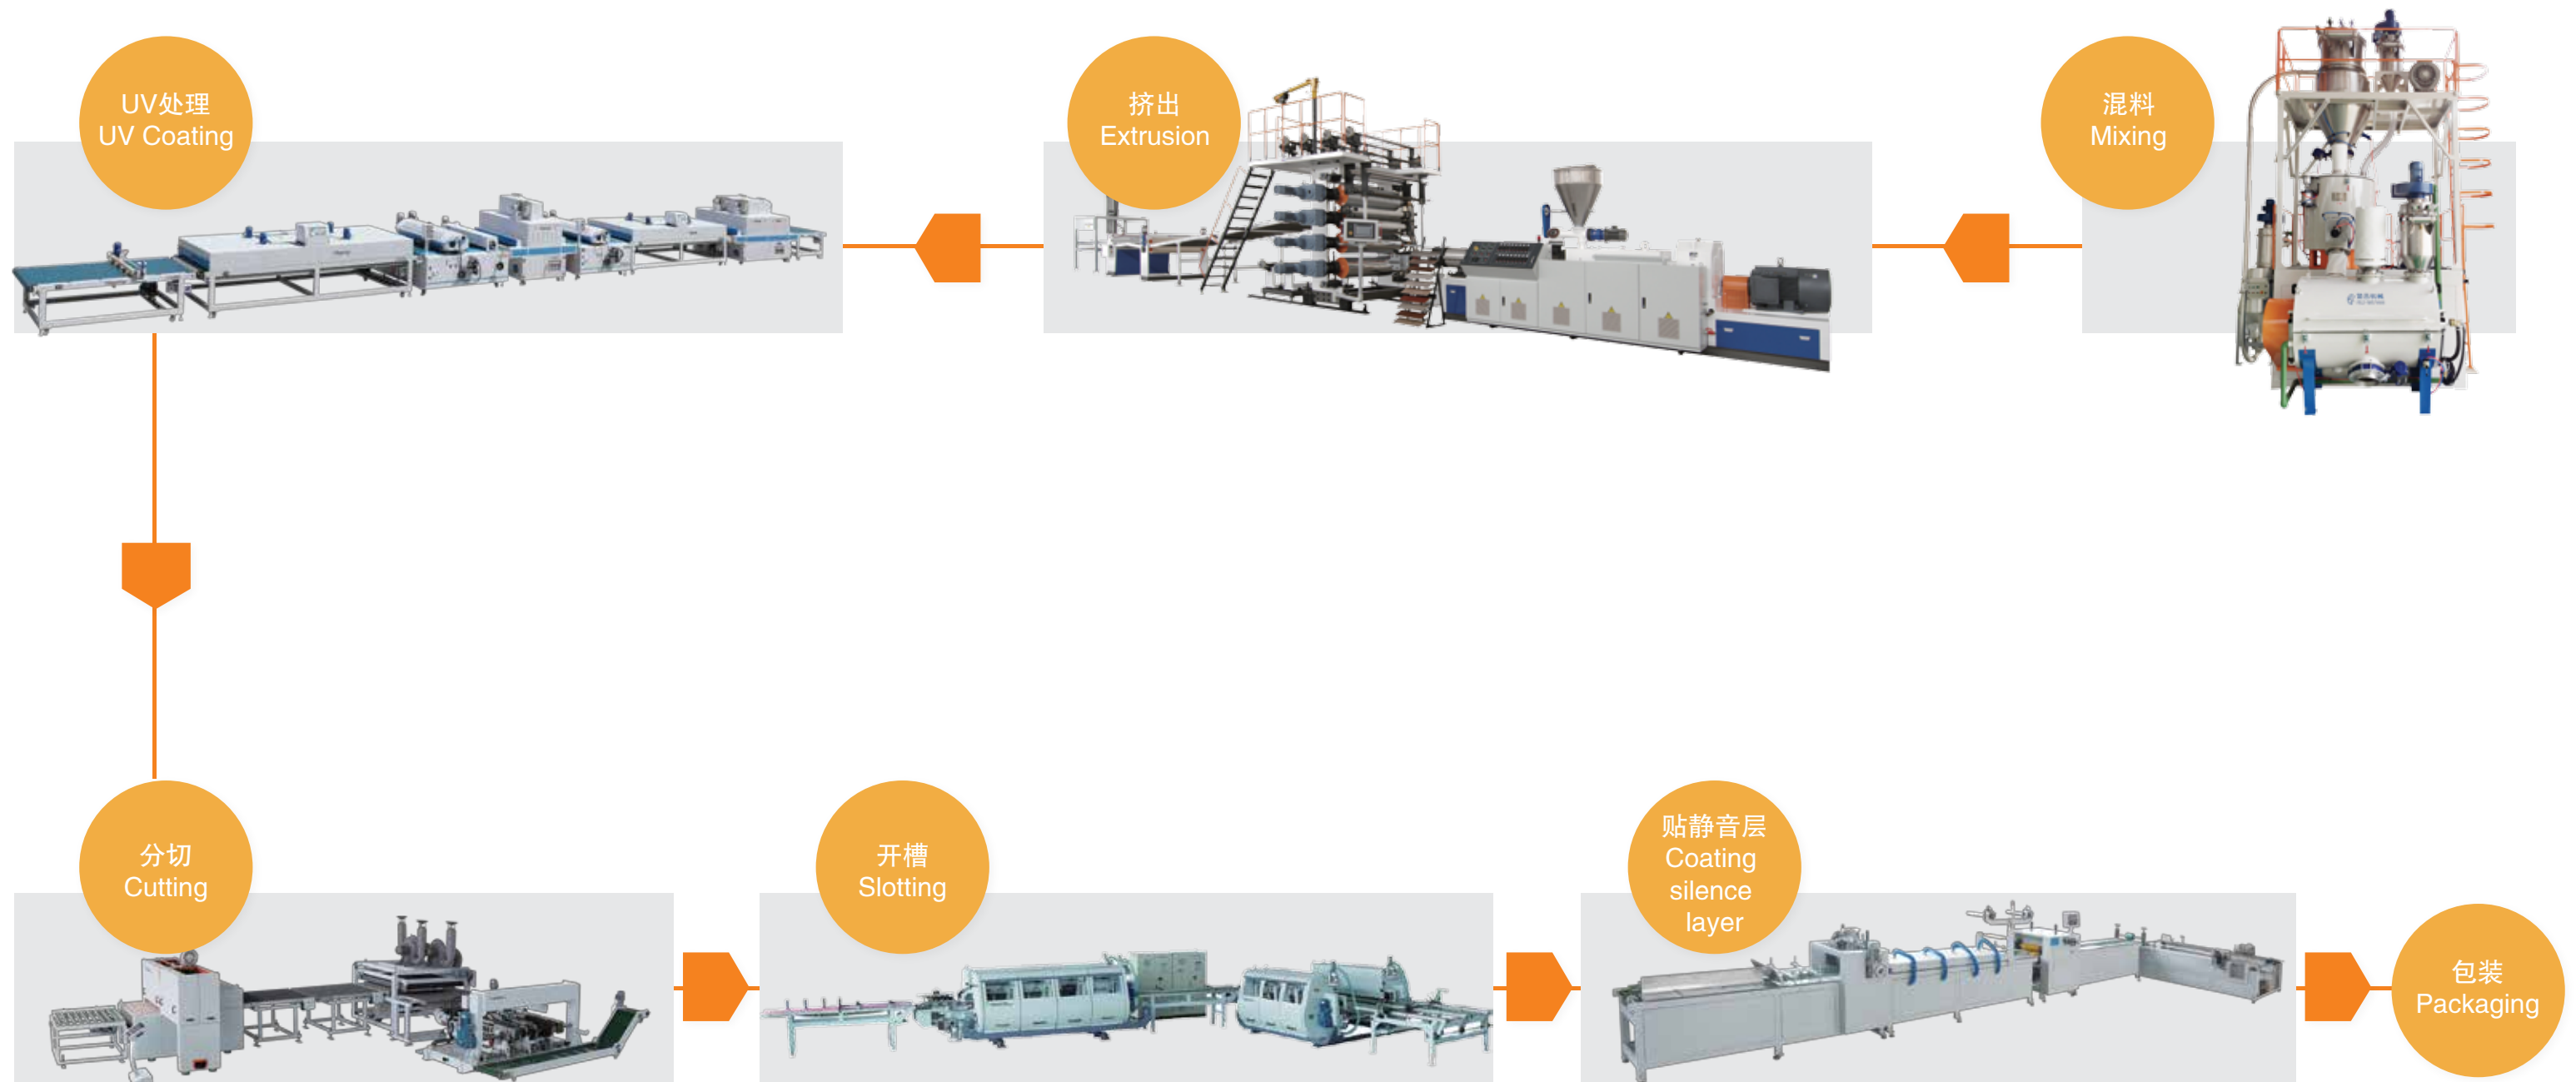


## 工艺流程 Flow Chat of WPC Production

### 1、室外产品 (PE、PP、PS) Outdoor Products 木塑两步法流程图 Flow Chat of WPC Two-step Line



### 2、室内产品 (PVC发泡) Indoor Products 木塑工艺流程图 Flow Chat of WPC process

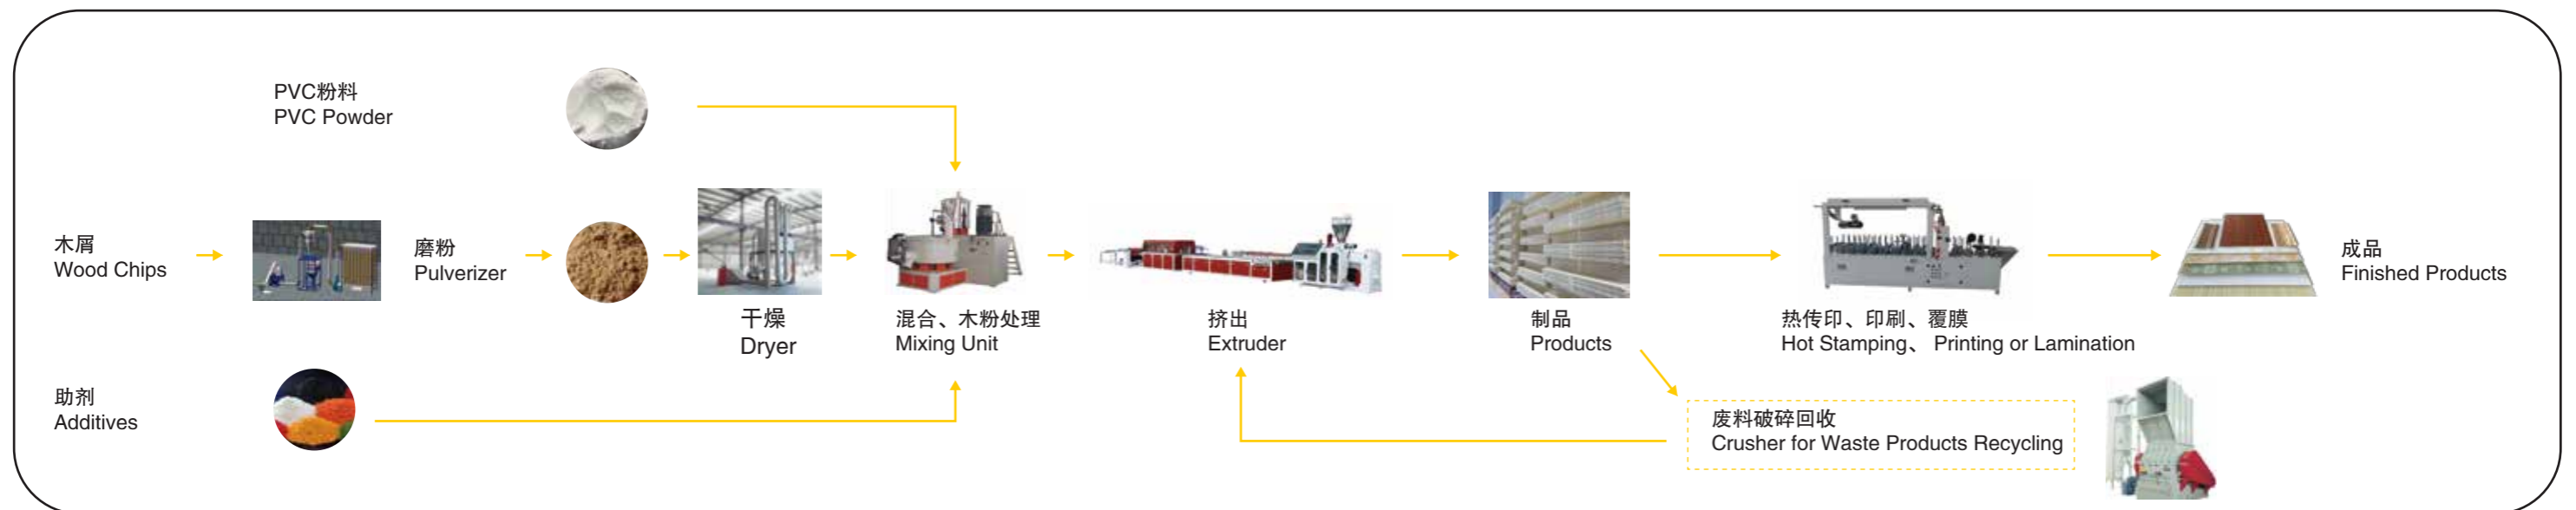

**相关产品产品链接** Linkage of Relating Auxiliary Equipment



同向平双双螺杆造粒机组  
Co-rotation parallel twin-screw pelletizing machine




自动换网器和液压站  
Hydraulic screen changer



800/2500 的卧式混料机  
Mixer




破碎机  
Crusher

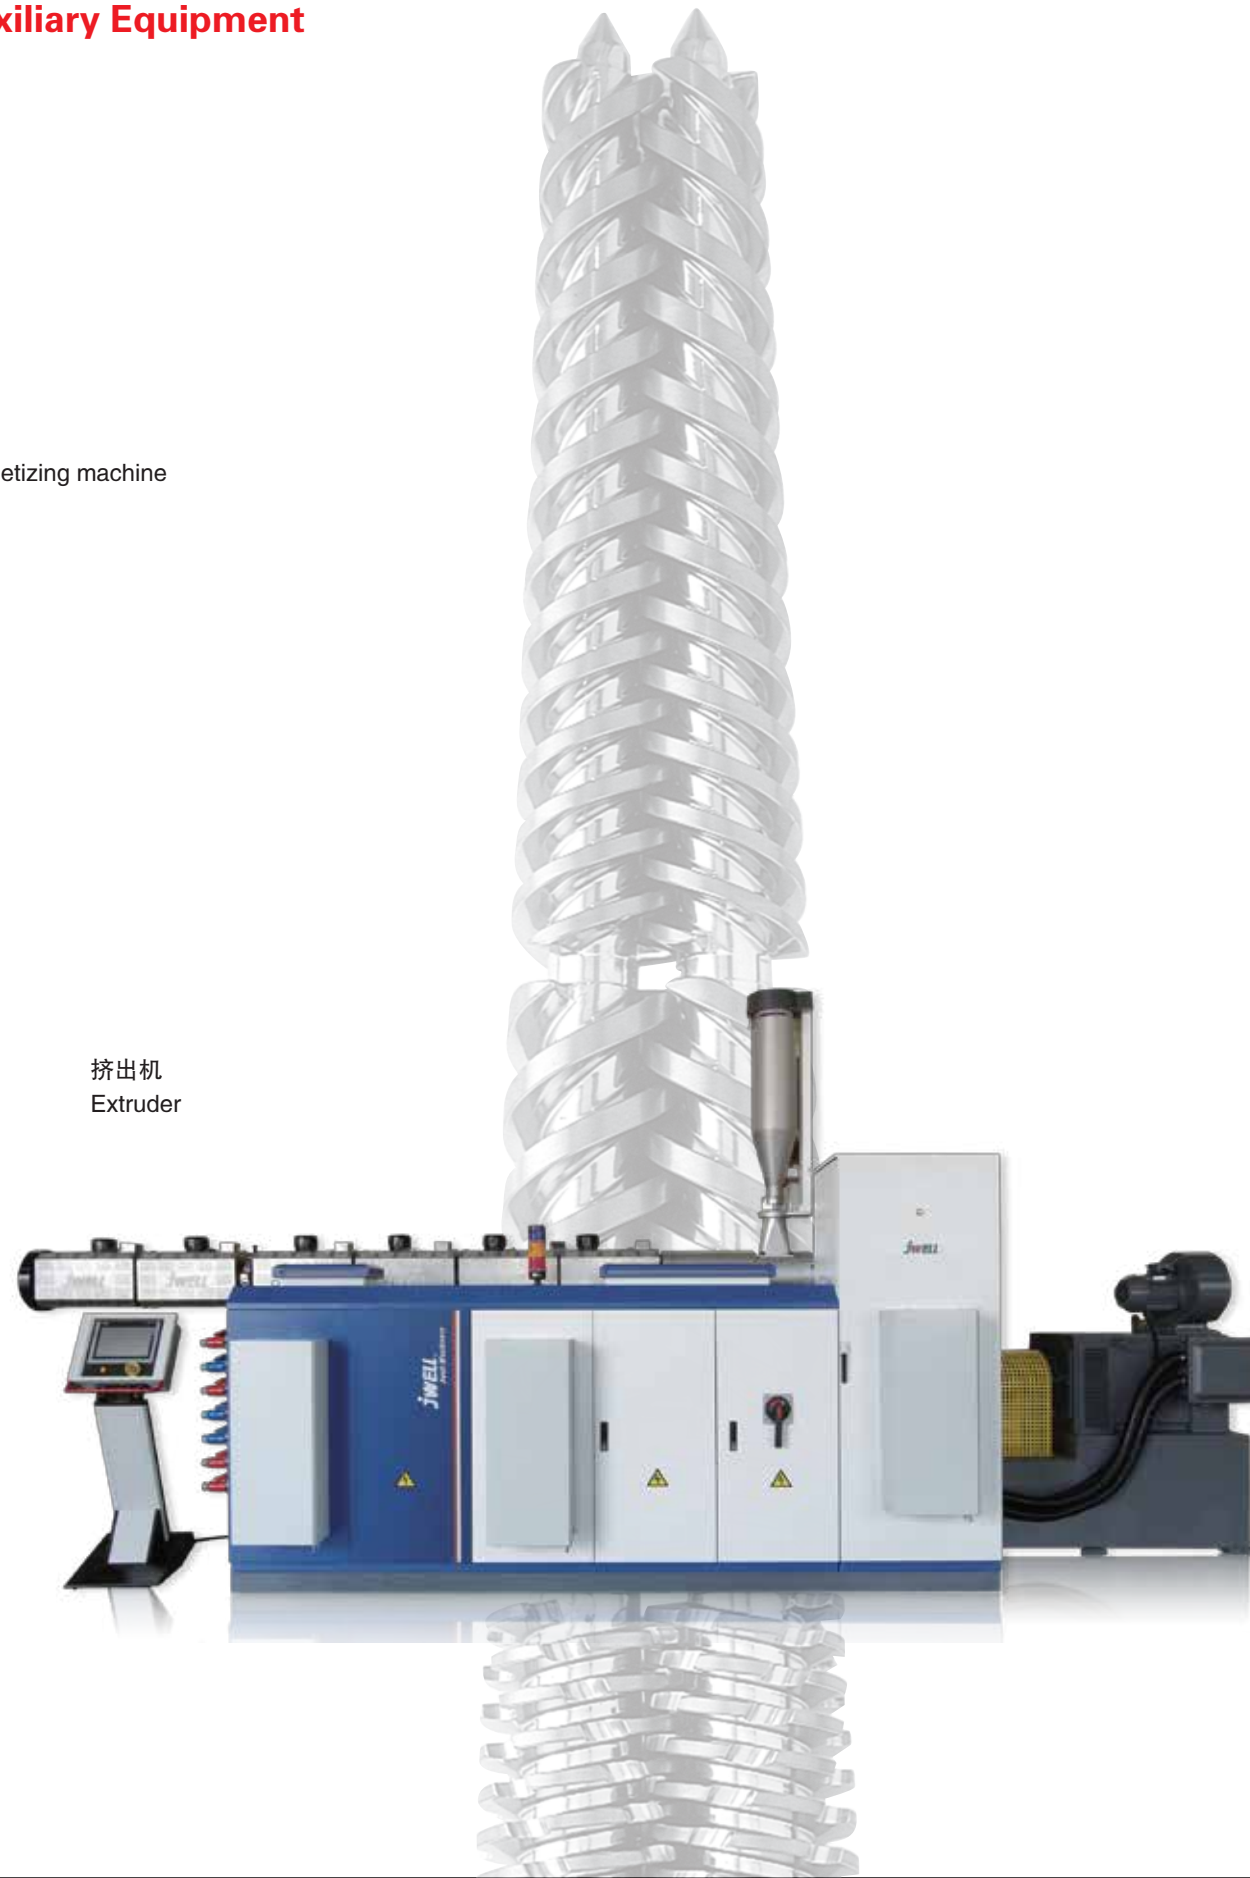

挤出机  
Extruder



螺杆、机筒  
Screw and barrel

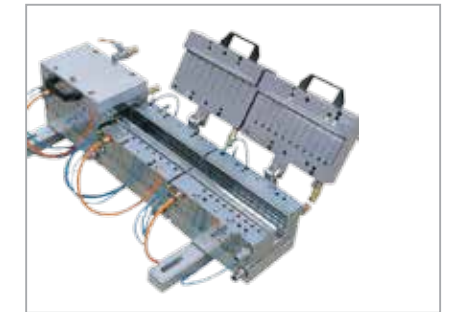

各类木塑型材模具  
All kinds of profile tooling



模具和分配器  
T-die and feedblock



各类镜面辊筒  
All kinds of mirror rollers

## 挤出机械物联网+智能制造解决方案



实时工况  
Real-time operating status

**方案1 免费体验版 (适用于有变频器的设备)**  
Programme 1 Free experience Edition( suitable for equipment with Inverter)

具备功能:1.可以监测主机实时电流及电流曲线。  
2.可以在手机上查看数据信息。  
Function :1、Monitor the current Electricity and Electricity curve  
2、Monitor the data by the phone.

方案优点  
1.随时了解自己设备的开机情况。  
2.电流曲线记录,可以展示给最终客户,用于说明管材或型材制品生产状态稳定,质量可靠。  
3.非PLC系统的生产线同样可以安装。  
Program advantage:  
1、Controlling equipment situation at any time.  
2、Showing the Electricity curve to final customer,that is used to explain the stable production state and reliable quality of pipe or profile products.  
3、Non-PLC system also can be installed in the production line.

**方案2 精优版 (仅适用于PLC系统设备)**  
Programme 2 excellent Edition ( suitable for equipment with PLC control system)

具备功能1.可以监测主机电流。  
2.可以监测主机温度。  
3.可以监测主机电能。  
4.可以监测主机每吨物料能耗(目前仅支持有米重控制的设备)。  
5.可以在手机上查看数据信息。

Function:1. Monitor the main Extruder Electricity.  
2. Monitor the main Extruder Temperature .  
3. Monitor the main Extruder Power.  
4. Monitor the energy consumption per ton of material( now just support the meter weight control).  
5. Monitor the data by the phone.

方案优点  
1.随时了解自己设备的开机情况。  
2.随时了解机器的能耗核算出开机成本。  
3.可向最终客户展示电流曲线、米重曲线等数据,用于说明管材或型材制品生产状态稳定,质量可靠。  
Program advantage:  
1、Controlling equipment situation at any time.  
2、Monitor the energy consumption of material and calculating the cost of running machine.  
3、Showing the Electricity curve, meter weight curve data and so on ,that is used to explain the stable production state and reliable quality of pipe or profile products.



作业情况统计  
Working status statistics

**方案3 精细版 (适用于有PLC系统或工控机设备)**  
Programme 3 detail Edition(Suitable for PLC control system or Industrial control machine equipment)

具备功能: 1.可以监测主机电流。  
2.可以监测主机温度。  
3.可以监测主机电能。  
4.可以监测主机每吨物料能耗(目前仅支持有米重控制的设备)。  
5.可以在手机上查看数据信息。  
6.可以记录并统计设备故障, 部件更换等信息。  
7.可以连接MES系统。  
8.可以远程调试程序。

Function:1. Monitor the main Extruder Electricity.  
2. Monitor the main Extruder Temperature .  
3. Monitor the main Extruder Power.  
4. Monitor the energy consumption per ton of material( now just support the meter weight control).  
5. Monitor the data by the phone.  
6. Record and statistics equipment breakdown situation, parts replacement information and so on .  
7. Connect EMS system  
8. Remote adjustment and control program


方案优点1.随时了解自己设备的开机情况。  
2.随时了解机器的能耗核算出开机成本。  
3.记录电流的大小,展示给最终客户,用于说明管材或型材制品生产状态稳定,质量可靠。  
4.随时远程检查调试程序,在机器出问题的情况下用最短的时间检查出故障点,维修好设备,将大大降低设备因故障停机的时间,提高生产效率。  
5.连接企业生产系统,便于企业记录并分析相关数据,更好提升生产效率,降低设备故障率。

Program advantage: 1、Controlling equipment situation at any time.  
2、Monitor the energy consumption of material and calculating the cost of running machine  
3、Record electricity size,showing to the final customer ,that is used to explain the stable production state and reliable quality of pipe or profile products.  
4、Remote adjustment and control program with any time.Once the machine has a problem,it will check out the fault point with shortest time and maintenance the equipment ,in order to greatly reduce the time of the equipment due to the machine breakdown and improve the production efficiency.  
5、Connecting enterprise production system, it is convenient for enterprises to record and analyze relevant data, to improve production efficiency and reduce equipment breakdown rate.

## Plastic Machinery Fully Integrated Automation + Internet Of Things Control System Solutions



基于MES系统平台,实现车间生产管理的信息沟通平台,并向智能化方向发展。



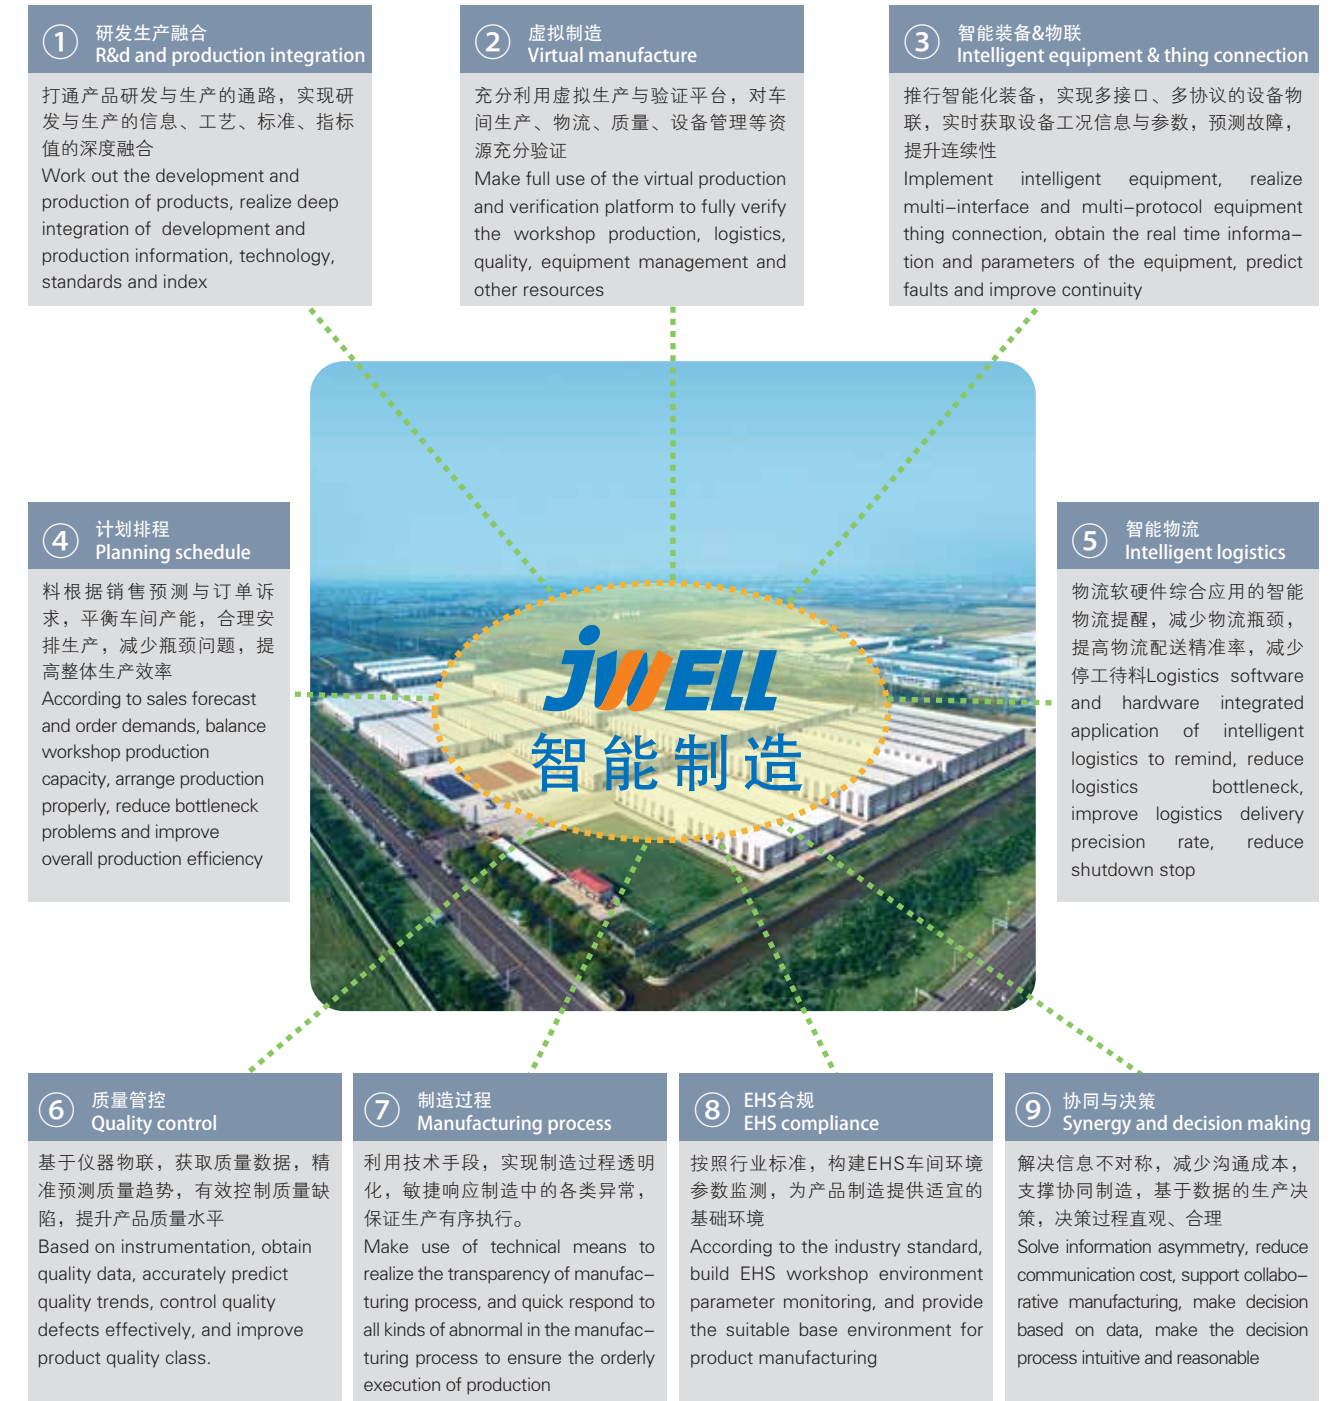

Based on the MES system platform, the information communication platform of workshop production management is realized and move toward the intelligent direction

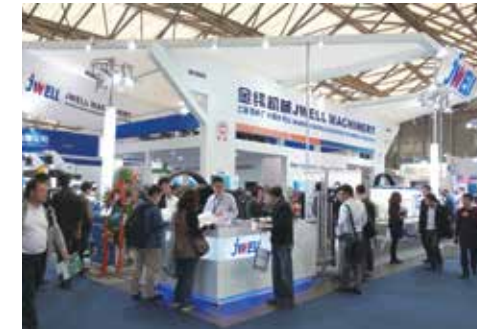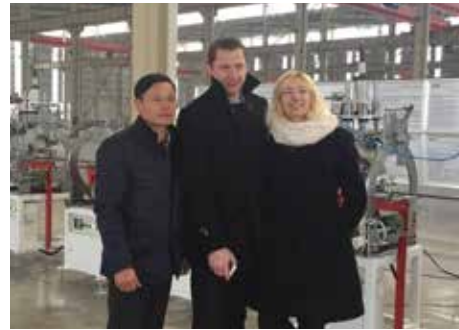

**企业风采：品质管理 技术研发 国际交流 客户服务 员工培训**

**Quality Control Technology Research International Communication Customer Service Staff Training**




 <p>24小时服务 24 Hours Service</p>	 <p>86-519 87836658 客户服务热线 Customer Service Hotline</p>	 <p>培 训 Training</p>	 <p>交钥匙工程 Turn-Key Project</p>
--------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------